

10/755,020

PRV-892



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06K 9/36, 9/46		A1	(11) International Publication Number: WO 97/39421
			(43) International Publication Date: 23 October 1997 (23.10.97)
(21) International Application Number: PCT/US97/05847		(81) Designated States: AU, CA, CN, JP, RU, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 9 April 1997 (09.04.97)			
(30) Priority Data: 08/633,386 16 April 1996 (16.04.96) US		Published With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.	
(71) Applicant: THE REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US]; 22nd floor, 300 Lakeside Drive, Oakland, CA 94612 (US).			
(72) Inventors: FEO, John, T.; 11321 Marwick Drive, Dublin, CA 94568 (US). HANKS, David, C.; 2675 Twin Creeks Drive, San Ramon, CA 94583 (US). KRAAY, Thomas, A.; 15192 Harrison Hill Lane, Leesburg, VA 22075 (US).			
(74) Agent: SARTORIO, Henry, P.; P.O. Box 808, L-703, Livermore, CA 94550 (US).			

(54) Title: METHOD FOR DATA COMPRESSION BY ASSOCIATING COMPLEX NUMBERS WITH FILES OF DATA VALUES

(57) Abstract

A method (10) for compressing data for storage or transmission. Given a complex polynomial and a value assigned to each root, a root generated data file (RGDF) is created, one entry at a time. Each entry is mapped to a point in a complex plane. An iterative root finding technique is used to map the coordinates of the point to the coordinates of one of the roots of the polynomial. The value associated with that root is assigned to the entry. An equational data compression (EDC) method reverses this procedure. Given a target data file (F'), the EDC method uses a search algorithm (22) to calculate a set of m complex numbers and a value map that will generate the target data file. The error (E) between a simple target data file and generated data file is typically less than 10 %. Data files can be transmitted or stored without loss by transmitting (26) the m complex numbers, their associated values, and error file (E) whose size is at most one-tenth of the size of the input data file (F).

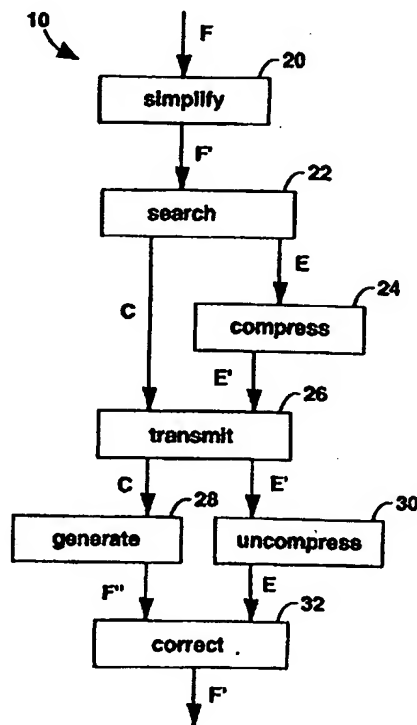

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MX	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD FOR DATA COMPRESSION BY ASSOCIATING
COMPLEX NUMBERS WITH FILES OF DATA VALUES

The United States Government has rights in this invention pursuant to Contract No. W-7405-ENG-48 between the United States Department of Energy and the University of California for the
5 operation of Lawrence Livermore National Laboratory.

BACKGROUND OF THE INVENTION

Field of the Invention

The present invention relates to data compression and more particularly to methods and systems for representing a computer data file as a set of complex number-value pairs.

Description of the Background Art

A so-called graphics interchange format (GIF) was developed
10 by a telephone-based information source, CompuServe Incorporated. GIF uses Lempel-Ziv and Welch (LZW) compression as its primary source of image compression. The syntax of the GIF data stream provides the information required for the preparation of LZW decoding, such as color maps. GIF compression is lossless, with a
15 compression ratio from 2:1 to 9:1 being possible, depending on the type of data being compressed.

LZW Encoding reduces the size of a data set in one dimension. The compression method developed by Lempel-Ziv and Welch, known as LZW compression, seeks to take advantage of
20 repeated sequences of data values, even when the repetition exists non-contiguously. A unique code replaces a repeated sequence in the encoded data set, saving bytes each time that sequence is repeated.

-2-

Consider the following data stream and its corresponding compressed data stream.

5 original data set 5 23 7 12 5 23 7 6 12 5 23 7 6 12
 compressed data set Code1 12 Code1 Code2 Code1 Code2

10 Given the compressed data set, a table or "codebook" which assigns values to each code is used to decode the data. In the example above, such a codebook would assign "5 23 7" to the entry for Code1. If the codebook is large, however, the overhead costs of storing it can greatly reduce the efficiency of compression. LZW compression was developed to avoid this storage requirement. It also has the pleasant characteristics of relatively low memory requirements, due to its sequential processing, and simplicity of algorithm, leading to
 15 implementations which use a relatively small amount of computer code.

20 In LZW compression, an encoder and decoder build identical codebooks as the data stream is processed sequentially. The encoder outputs a pattern code only after it has found the pattern more than once. The first time it processes a sequence of data, it places that sequence in its codebook and outputs the sequence without any encoding. During decoding, this sequence is output and an entry into the codebook is made for this sequence. The entry is assigned a code in the same manner that the encoder assigned a code, so that when this
 25 code is encountered later, the decoder will output the correct sequence of values.

30 To further illustrate LZW compression, the following algorithms for encoding and decoding are presented, together with simulation examples for each. Here, a colon is used to indicate concatenation. For example "abc" : "d" = "abcd".

-3-

encoding

```
5 initialize the codebook - one entry for each possible individual
   value
   prefix = empty string
   repeat
10     dataValue = next data value in data stream
       if prefix : dataValue is already in codebook
           then prefix = prefix : dataValue
       else {
           add prefix : dataValue to the codebook
           output the prefix code from the codebook
           prefix = dataValue}
   until all the data values are processed
15 output the code from the codebook for prefix
```

For the encoding algorithm, a string of data values is built until the string is different from any other previously coded string. New data strings are always made of some previously known strings (which has been entered into the codebook) plus one new data value.

20 When a new pattern is found the new pattern is immediately added to the codebook, the code for the prefix of the new data string is output, and the data string is reinitialized to begin the search for a new data string. Each time a code is output, a new entry is made in the codebook.

-4-

simulation of encoding

assuming that original data can be one of three different values - a, b, or c. Consider the sample data stream "a b a b b b b c".

Initialize the codebook as follows:

Code	Data Value	Prefix : Data Value
0	a	- : a
1	b	- : b
2	c	- : c

prefix = empty string

input dataValue	prefix: dataValue	new codebook entries		output	new prefix
		code	data string		
a	- : a	[code 0 already entered]			0
b	0 : b	3	ab	0	1
a	1 : a	4	ba	1	0
b	0 : b	[code 3 already entered]			3
b	3 : b	5	abb	3	1
b	1 : b	6	bb	1	1
b	1 : b	[code 6 already entered]			6
c	6 : c	7	bbc	6	2

output last prefix value: 2

-5-

decoding	
	initialize the codebook - one entry for each possible individual value
	code = the first code value in the compressed data stream
5	output the data string that corresponds to code in the codebook
	repeat
	oldCode = code
	code = next code value from compressed data stream
	if code already exists in the codebook
10	then {
	output the data string corresponding to code
	prefix = oldCode
	suffix = first value from output data string }
	else {
15	prefix = oldCode
	suffix = first value from the prefix data string
	output prefix : suffix)
	add prefix : suffix to the codebook
20	until all code values are processed

For the if-statement, when the input code is already in the codebook, it is a straight forward process to output the string corresponding to that code. When a code is encountered which is not yet in the codebook, the immediately preceding data values must form the new data string. The new data string being formed is immediately preceded by itself. Since the preceding suffix starts the current prefix, the new code's data string must begin and end with the same data value. And since the pattern is repeated, the prefix of the new data string must be the string corresponding to the code previously input to the decoder. Therefore, the value of the undefined code is oldCode concatenated with the first value of OldCode.

-6-

simulation of decoding

The encoder produced the data stream "013162". This now becomes our input for the decoder.

Initialize the codebook as follows:

Code	Data Value	Prefix : Data Value
0	a	- : a
1	b	- : b
2	c	- : c

code = 0

output a (data value of code 0)

			<u>new codebook entries</u>						
		in					<u>prefix:</u>		
oldCode	input Code	codebook?	prefix	suffix	output	code	string	suffix	
0	1	yes	0	1	b	3	ab	0:1	
1	3	yes	1	0	ab	4	ba	1:0	
3	1	yes	3	1	b	5	abb	3:1	
1	6	no	1	1	bb	6	bb	1:1	
6	2	yes	6	2	c	7	bbc	6:2	

The string produced by the decoder, "ababbbbc", is the original string which was input into the encoder.

The effectiveness of LZW compression is data dependent. Simple line drawings that are stored in raster format can be compressed as much as 16:1 or more. Raster scanned photographs are expected to achieve compression ratios from 2:1 to 9:1.

The Joint Photographic Experts Group (JPEG) has issued a suite of standards, with twenty nine distinct coding processes in all. The so-called JPEG compression standard was intended to satisfy a broad range of applications. Its seeks high compression ratios and high image fidelity. Applications can select from a broad range of compression ratios, trading off image quality for higher compression to meet the specific needs of an application. No restrictions are made on the image contents, e.g., complexity or range of colors, or characteristics, such as resolution. A manageable computational complexity allows for reasonable software implementations and fast hardware

-7-

such as resolution. A manageable computational complexity allows for reasonable software implementations and fast hardware implementations. A lossless encoding mode provides for exact image reproduction. A sequential encoding mode provides for image reproduction using multiple passes through the data, where the image is initially blurry and each pass through the data adds further clarity to the image. And a hierarchical encoding mode is provided for image reproduction using a sequence of frames, each at different resolutions.

Other prior art data compression methods exist and some are in wide use. However, all leave the user wanting higher levels of compression with lower losses occurring in such compression. No conventional compression method has thus far proven totally satisfactory, even in particular applications.

SUMMARY OF THE INVENTION

An object of the present invention is to provide a method for starting with a data file to compress and finding the roots of the polynomial, assuming such a polynomial exists, that will generate the same data file in a reconstruction either exactly or within some threshold of error.

Briefly, a method embodiment of the present invention compresses data for storage or transmission. For a data file of pixel values organized as an $n \times n$ grid of pixels, the data file of pixel values, or any computer data file, may be compressed by the method of the present invention. Letting G be an $n \times n$ grid superimposed on the complex plane, and P , an m degree polynomial. Letting A be a function of the first derivative of P , and letting B be a function of the second derivative of P . And further letting $C(i)$ be a map to a unique color for each root of P , where $1 \leq i \leq m$. A and B are then iteratively solved for each z in G . The solution ultimately converges within some epsilon of one of the roots of P . When z converges to root i , $C(i)$ is assigned to z . P , A and B can be defined for any m numbers in the complex plane and

-8-

color function C to generate a data file of pixel values encoded by m complex numbers.

An advantage of the present invention is that a method for compressing data is provided.

5 Another advantage of the present invention is that a method of compressing data with few losses and high compression ratios is provided.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a flowchart of an equational data file compression method embodiment of the present invention for data compression;

10 Fig. 2 shows a more detailed flowchart of the method of Fig. 1;

Fig. 3 is a flowchart for a generic search method useful in the method of Fig. 2; and

15 Fig. 4 is a flowchart of a generating method useful in the method of Figs. 2 and 3.

DETAILED DESCRIPTION OF THE INVENTION

Figs. 1 illustrates an equational data compression (EDC) method embodiment of the present invention for compressing and decompressing data, and is referred to herein by the general reference numeral 10. The EDC method 10 comprises a compression step 12, a transmission step 14, and a decompression step 16. The compression step 12 takes the data file F and returns a data file F'. The file F is a file of values whose type depends on the data medium. For example, if the file F is a text file, then the values might be octal numbers such that F(i) encodes the i-th character of the text. If the file F is a data file file, then
20 the values might be eight-bit binary numbers such that F(i) encodes the color of the i-th pixel of the data file. The compression step 12 reduces the size of the data file to minimize the amount of data that needs to be transmitted or stored by the transmission step 14.
25

-9-

The transmission step 14 either transmits or stores the data file F' . The transmission or storage of data is assumed here to be without error. Any of a number of conventional methods may be used to detect and/or correct errors due to faulty transmission or storage.

5 The decompression step 16 inputs the data file F' and outputs the data file F'' . It uses an inverse method to that used by the compression step 12 to uncompress the data. Where file F'' equals file F , then the compression method was lossless. Otherwise, the compression resulted in data loss. The extent to which the
10 compression method is lossy depends on the methods used steps 12 and 16.

Fig. 2 illustrates the EDC method 10 in greater detail. A simplify step 20, a search step 22, and a compress step 24 are equivalent to the compression step 12 of Fig. 1. A transmission step 26 is
15 equivalent to the transmission step 14 of Fig. 1. A generating step 28, a decompression step 30, and a correction step 32 are equivalent to the decompression step 16 in Fig. 1. The simplify step 20 takes the data file F and returns a simplified data file F' . This step may or may not be empty. The form of the simplification is data dependent and the
20 degree of simplification depends on the amount of loss information tolerable by the sender and receiver. For example, this step might reduce the number of colors in a data file from a maximum of 256 to twenty six by dividing each value in the file F by 10. The search step 22 takes the data file F' and returns two outputs, C and E . Output C is a
25 set of tuples $\{z, v\}$, such that z is complex number, and v is a value in F' . The search step 22 uses a search heuristic to find C such that $G(C, i) = P'(i)$. Since it is unlikely that the search heuristic will return a set of numbers that regenerates P' without loss, the step returns an error file E . The tuple $\{i, y\}$ is in E if and only if $G(C, i) \neq F'(i)$ and $F'(i) = y$. A
30 conventional genetic algorithm is used to find C , however, practically any search algorithm can be used. The compression step 24 compresses

-10-

the file E, e.g., using any conventional lossless compression algorithm. Its output is the data file E'. The transmission step 26 either electronically transmits or stores C and E', e.g., across the Internet or into a hard disk file. Such transmission or storage of the data is
5 assumed here to be without error. The generating step 28 implements the generation of an algorithm G, described in connection with Fig. 4. The generating step 28 inputs a set of complex numbers C and returns the data file P''. The decompression step 30 uncompresses the data file E' to regenerate a data file E without loss. The correction step 32 inputs
10 files F'' and E, and returns a data file F'. For each tuple {i, y} in E, the box sets the value of F''(i) to y.

The search step 22 of Fig. 2 searches the complex plane for a set of tuples {z, v} such that a generate method can return a file F'' as close as possible to F'. Any discrepancy between F'' and F' is returned
15 in E. The particular search algorithm used is not important. A genetic algorithm whose gross structure is shown in Fig. 3 has been used successfully. The particular mating, mutation, and replacement method used is beyond the scope of this description. Possible choices of methods are well documented in the literature.

Fig. 3 illustrates a generic search method 40. A step 42
20 generates a population of possible solutions, e.g., it generates two or more possible values for C. Each value is referred to as an individual of the population. A step 44 mates the individuals of the population and thus generates a set of new individuals. As in nature, the method
25 tends to preserve the best characteristics of the population and to eliminate the worse characteristics. Over the generations, the population includes fitter and fitter individuals, e.g., better and better solutions to the search problem. Typically, the methods implemented by steps 50 and 52 of Fig. 3 are used to evaluate the fitness of
30 individuals. A step 46 mutates selected individuals. Mutations or random changes to the data are necessary to prevent the method from

-11-

becoming stuck at a local maximum. A step 48 replaces individuals from the previous generation with those born and mutated by steps 44 and 46, respectively. An output of step 48 is the next population of individuals. A step 50 generates a data file for each individual in P.

5 The set of data files is G. The step 50 is equivalent to step 28 of Fig. 2. A step 52 calculates the error between F' and each data file generated by step 50. A typical error function is the sum of $\text{diff}(i)$, where $\text{diff}(i)$ is 1 if the two files have different values at position i , else 0. Step 52 returns the smallest error value computed (e), the individual that generated the smallest error value (C), and a file of the differences between that individual and F' (E). A step 54 compares the error value with some threshold value. If the comparison is true, then the search terminates and C and E are returned; else, the new population and control are passed back to step 44.

15 The generation step 28 of Fig. 2 generates the file F'' of n values, $1 \leq i \leq n$, from C . Letting P be a m -th degree complex polynomial whose roots r_j , $1 \leq j \leq m$, m complex numbers in C , and letting T be a function that transforms integers to complex numbers, then for each integer i , $1 \leq i \leq n$, step 28 executes the data flow shown in Fig. 4. The inputs to the generating step 28 of Fig. 2 are assumed to be available to all the steps in Fig. 4 and so, do not explicitly show their edges.

25 Fig. 4 illustrates a generating method 60. A step 62 applies a transform function T to i and returns z . The appropriate transform function to use depends on the type of the data file. For example, if the data file is a 2-D data file of size n by n , then $T(i)$ might return the complex number $\{(i \text{ div } n)/n, (i \text{ mod } n)/n\}$. A step 64 computes $P(z)$. If the computed value is less than some small value, then the step returns yes. Otherwise, the step 64 returns no. If the step 64 returns no, then control is passed to a step 66 that computes the displayed expression returning two complex values, a^+ and a^- . A step 68 passes

-12-

the value with the smallest absolute value to a step 70 that decrements
 z by this value. The decremented value and control back are passed
 back to the step 64. If the step 64 returns yes, then control is passed to a
 step 72 that searches C, and returns the value associated with the
 5 complex number in C closest to z. The iterative computation of Fig. 4
 terminates when z is within epsilon of some root of P.

An equational data compression (EDC) method of the present
 invention reverses the creation data files that used an iterative root
 finding method. Data files can be created using this method, and
 10 equations which closely approximates a given data file can also be
 found.

An iterative root finding method, developed by one of the
 present inventors, Thomas Kraay, starts with a complex function, P,
 with m complex roots and an arbitrary initial guess z, in the complex
 15 plane, the iterative root finding method converges unexpectedly fast to
 one of the function's roots, usually in two to four iterations. The
 method has converged over ten million times to within 10^{-6} of a root
 value.

The iterative root finding method, e.g., illustrated in Fig. 4,
 20 can be described mathematically, as follows:

Let P(z) be a known polynomial with unknown roots r_1, \dots, r_m . Then,

$$P(z) = \prod_{i=1}^m (z - r_i).$$

For $z \in \{r_1, \dots, r_m\}$, take the natural log of both sides to get,

25
$$\ln P(z) = \ln \prod_{i=1}^m (z - r_i) = \sum_{i=1}^m \ln(z - r_i).$$

-13-

Taking the derivative of both sides,

$$\frac{d}{dz} \ln P(z) = \frac{d}{dz} \sum_{i=1}^m \ln(z - r_i) = \sum_{i=1}^m \frac{d}{dz} \ln(z - r_i) = \sum_{i=1}^m \frac{1}{(z - r_i)},$$

and since,

$$\frac{d}{dz} \ln P(z) = \frac{P'(z)}{P(z)},$$

5 then,

$$g(z) = \frac{P'(z)}{P(z)} = \sum_{i=1}^m \frac{1}{(z - r_i)}. \quad (\text{eq. 1})$$

Now taking the derivative of $g(z)$ with respect to z , provides,

$$\frac{d}{dz} \frac{P'(z)}{P(z)} = \frac{d}{dz} \sum_{i=1}^m \frac{1}{(z - r_i)} = \sum_{i=1}^m \frac{-1}{(z - r_i)^2},$$

and since,

$$10 \quad -\frac{d}{dz} \frac{P'(z)}{P(z)} = \frac{[P'(z)]^2 - P(z)P''(z)}{P^2(z)},$$

then,

$$h(z) = \frac{[P'(z)]^2 - P(z)P''(z)}{P^2(z)} = \sum_{i=1}^m \frac{1}{(z - r_i)^2}. \quad (\text{eq. 2})$$

-14-

Given a complex number z , the values of $g(z)$ and $h(z)$ can be calculated. Let r_j represent some root of $P(x)$, and define the value a such that,

$$a = z - r_j . \quad (\text{eq. 3})$$

5 The equations (1) and (2) can be rewritten,

$$g(z) = \frac{1}{a} + \sum_{\substack{i=1 \\ i \neq j}}^m \frac{1}{(z - r_i)} \quad \text{and} \quad (\text{eq. 1a})$$

$$h(z) = \frac{1}{a^2} + \sum_{\substack{i=1 \\ i \neq j}}^m \frac{1}{(z - r_i)^2} . \quad (\text{eq. 2a})$$

There exists a complex number b such that,

$$\sum_{\substack{i=1 \\ i \neq j}}^m \frac{1}{(z - r_i)} = \frac{m-1}{b} ,$$

10 giving

$$g(z) = \frac{1}{a} + \frac{m-1}{b} . \quad (\text{eq. 1b})$$

Let ϵ be the complex number, such that,

$$\sum_{\substack{i=1 \\ i \neq j}}^m \frac{1}{(z - r_i)^2} = \frac{m-1}{b^2} + \epsilon . \quad (\text{eq. 4})$$

-15-

For $m > 2$, discarding ϵ , introduces error, but gives,

$$h(z) = \frac{1}{a^2} + \frac{m-1}{b^2} \quad (\text{eq. 2b})$$

There are two equations (1b) and (2b) in two unknowns (a and b). It can be shown that,

$$5 \quad a^{\pm} = \frac{m}{g(z) \mp \sqrt{(m-1)(mh(z) - g^2(z))}} \quad (\text{eq. 5})$$

Which is equivalent to the step 66. To aid in convergence, a is assigned the value of smaller magnitude,

$$a = \begin{cases} a^+ & \text{if } |a^+| < |a^-| \\ a^- & \text{otherwise} \end{cases} \quad (\text{eq. 6})$$

10 Which is equivalent to the step 68. By equation (3), $r_i = z - a$ is a root of the equation. However, having discarded ϵ this equality no longer holds. $z - a$ now only approximates r_i .

Given an initial guess z , $P(Z)$ is calculated. If the absolute value is greater than ϵ , a is calculated letting $z = z - a$, e.g., step 70. Repeating this process, as in the step 64, until the absolute value of $P(z)$ is less than ϵ , a root of the polynomial is converged within ϵ .

15 The iterative root finding method is used to generate data files. A file of size n , $0 \leq i \leq n-1$ is created, using the iterative root finding method. Let $P(Z)$ be a polynomial with roots r_1, \dots, r_m and let v_1, \dots, v_m be a set of m values. Start by defining a transformation
20 function from integers to points in the complex plane. Letting $n = W * H$, then $T(i)$, $0 \leq i \leq n-1$, returns the complex number,

-16-

$$z = \left\{ \frac{i \text{ div } W}{H}, \frac{i \text{ mod } W}{W} \right\}.$$

Which is equivalent to the step 62.

Using z as an initial guess, the iterative method is used to calculate a root of $P(z)$. As in the step 72, if the i -th root is returned,
 5 then the value v_i is assigned to the i -th datum in the file. The resulting file of values is referred to as a root generated data file (RGDF) and the procedure is called a generation process. For example, to create a data file data file of 40,000 pixels. Let $W = 200$, $H = 200$, $r_1 = 0.0 + 0.0i$, $v_1 = \text{blue}$, $r_2 = 0.75 + 0.75i$, $v_2 = \text{green}$, $r_3 = 0.8 - 0.15i$, $v_3 = \text{gray}$, $r_4 = 1.5 -$
 10 $0.50i$, and $v_4 = \text{purple}$. Then, the RGDF created corresponds to a particular data file. Such file is uniquely encoded by the four root-value pairs used to create it.

The generation process can be reverse engineered. Since EDC is given a data file F of size n , $0 \leq i \leq n - 1$, with m unique values, the
 15 m complex numbers can be found such that the RGDF returned by the generation process is equivalent to F . Although reversing the mathematical formulations might appear impossible, an attractive solution method is the use of general purpose search methods. The problem can be viewed as a search for m points in the complex plane,
 20 where the optimality of a set of m points is defined by a fitness function. The current embodiments use a genetic algorithm to search for the m points, e.g., as in Fig. 3.

Genetic algorithms are search algorithms that depend on an imitation of nature and use the mechanics of natural selection and
 25 natural genetics. The object is to improve a set of initial solutions, referred to as a "population" of individuals, using "recombination" and "mutation" of their "genetic material". The method combines survival of the fittest among solutions with a structured and randomized information exchange.

-17-

Each "generation" creates new solutions that replace old and ineffective solutions in the population. A solution's probability of recombination is directly proportional to its fitness. Only the most effective solutions survive. The selection of solutions for recombination and mutation, as well as the replacement of solutions in the population are driven by genetic operators controlled by probability.

Genetic algorithms can work with several solutions at the same time, improving the solutions in each generation, while simultaneously exploring new solutions in the search space. Genetic algorithms are also easily adapted to a variety of problems requiring adjustments to only the representation of solutions and the fitness function. Because the objective function used to measure fitness is the only information used to guide the search, no auxiliary or derivative information is required.

A simple genetic algorithm (SGA) is described with the aid of the pseudo code of Table I. A solution consists of one, or occasionally more, bit-encoded strings, or chromosomes. Each bit's position is its locus and the value of the bits as its allele (0 or 1 for binary strings). For simplicity, unless otherwise stated, we assume a single chromosome per individual and binary alleles.

TABLE I

25	randomly create and evaluate an initial population of size n for gen = 1 to MAX_GEN
	create a mating pool selecting individuals from the population using fitness proportionate selection
	form n/2 pairs from the mating pool and perform crossover and mutation
30	replace current generation with offsprings evaluate the fitness of the new population
	end for

output fittest individual as the solution

The first generation of a genetic algorithm consists of individuals whose chromosomes are randomly constructed, e.g., step 42. Assuming that genes may be one of two values, either 0 or 1, and letting P_1 be the probability that a given gene will have the value 1. Each gene of each chromosome in the initial population can be assigned a value 1, with probability P_1 , or a value of 0, with probability $P_0 = 1 - P_1$.

Once the procedure has defined all genes of a chromosome, it then applies the fitness function to determine the chromosome's fitness value. Once the procedure has created an initial population and determined the fitness of each individual, it then creates the next generation.

For successive generations, several mate selection, mating, and replacement are used. The process is continued for an indicated number of generations, or until some other terminating condition is encountered.

As the step 44 illustrates, mate selection selects n individuals to parent offspring in the next generation. The selected individuals create a mating pool. Such individuals are chosen according to their fitness values. On average, those with higher fitness values are selected more often than those with lower fitness values. More exactly, the probability that the algorithm selects individual I_i with fitness F_i is,

$$P_i = \frac{F_i}{\sum_{j=1}^n F_j}$$

Such method, known as fitness proportionate reproduction (FPR) selection, is an artificial version of natural selection, a Darwinian "survival of the fittest" among individuals.

-19-

Table II represents a sample population of four individuals, their fitness values and selection probabilities, and the results of mate selection. In this example, the string is a binary number and the fitness function is $f(x) = x^2$.

5

TABLE II


INDIVIDUAL		FITNESS	SEL. PROB.	Mating Pool
i	Ii	Fi	Pi	
1	10011	361	0.310	11001
2	00110	36	0.031	10011
3	01100	144	0.123	01100
4	11001	625	0.536	11011
Total		1166	1.000	

Once the mate selection is complete, the members of the mating pool are randomly divided into pairs for mating. Their chromosomes are manipulated by crossover and mutation with probability P_x and P_m , respectively.

10

During the crossover operation, a crossover site, a position between the individuals' genes, is selected at random. The alleles to the right of the crossover site are then swapped between the pair, as in Table III.

TABLE III



As in step 46, when $P_x < 1.0$, some pairs may not undergo the crossover operation, but all pairs are subject to mutation. The mutation operation considers each allele in every individual, and changes its value with probability P_m . When an allele is mutated, its value changes from 0 to 1 or 1 to 0. This operation allows the algorithm to recover genetic material which has been lost and to introduce new genetic material.

Table IV illustrates a full reproduction phase for $P_x = 0.667$ and $P_m = 0.033$.

TABLE IV

i	Mating pairs	fitness	After crossover	After mutation	New generation	fitness
1	11001	625	11 100	11100	11100	784
2	01100	144	01 001	01001	01001	81
3	10011	361	10011	10011	10111	529
4	11001	625	11001	11001	11001	625
Total		1755				2019

The step 48 includes a steady state genetic algorithm (SSGA) that is a variant of the SGA. In the SSGA, only a subset of individuals in a population, e.g., a "generation gap", are replaced in every

-21-

generation. The size of the generation gap, G , is usually expressed as a fraction of the overall population size. Thus, if n is the population size, the number of individual to be replaced each generation is $G * n$. A commonly chosen value for G is $2/n$. Only one pair is chosen to
5 mate, and their offspring replace two individuals in the population. When $G = 1.0$, the algorithm replaces all individuals, as is equivalent to the SGA. With $G < 1.0$, a replacement rule is need to decide which individuals should perish to make room for the new offspring. Such individuals could be those with the lowest fitnesses. In inverse
10 ranking, the individuals are ranked according to their fitnesses. Each individual is considered, starting with the least fit, and individuals are eliminated with probability greater than $1/n$ until only two individuals remain.

SSGA thus imitates nature more accurately than the SGA,
15 but has several drawbacks. Because low fitness individuals are quickly dismissed, the fitter individuals tend to dominate faster, leading to a greater possibility premature convergence. Also, the SSGA is not easily parallelizable, depending on the size of G . If $G=2/n$, there is no parallelism.

20 A variation of the SGA with linear fitness scaling has been used with success in embodiments of the present invention. The deviation from ordinary SGA involves the encoding of the problem and the manipulation of roots. Various methods have been attempted, e.g., in the initial population generation and root mutation.

25 The data file to compress is defined here as the target file. The target file is compressed and encoded with method embodiments of the present invention.

For encoding, an individual is comprised of a chromosome with N binary alleles, and N complex numbers and values, one for
30 each locus in the chromosome. Table V represents an individual in this encoding.

TABLE V

allele 0	complex # 0	value 0
allele 1	complex # 1	value 1
allele 2	complex # 2	value 2
...	...	
allele N-1	complex # N-1	value N-1

5 A complex number is active if its corresponding allele in the chromosome is one. The roots of the polynomial associated with the individual are the active complex numbers. Thus, the degree of this polynomial is exactly the number of ones in the chromosome.

Table VI represents a polynomial associated with a sample individual.

10

TABLE VI

0	$5.0 + 3.2i$	blue
1	$3.3 - 1.6i$	red
1	$-2.4 + 10.0i$	grey
0	$4.1 - 5.9i$	purple
1	$-0.1 - 1.7i$	green

$$P(z) = [z - (3.3 - 1.6i)] [z - (-2.4 + 10.0i)] [z - (-0.1 - 1.7i)]$$

15 For the initial population, the value of each allele in each chromosome in the initial population is randomly chosen 0 or 1, with

equal probability. The complex numbers corresponding to each locus are chosen by creating a vector of random angle and random length (less than some value, L), transforming it to the form $x+iy$, and adding it to C , a complex number in the middle of the frame in the complex plane into which pixel locations are translated. Each locus of each chromosome in the population is assigned its own randomly generated root. Values are assigned randomly with equal probability.

For successive generations, mate selection, crossover, and mutation are conventional, except for a few points. No replacement policy is needed since as we use the SGA model. The triplet of allele, root, and color always stay together. Thus, when a crossover occurs, the roots and colors corresponding to each moved allele are also moved. The changing of the value of a root is also different. Like mutation of alleles, each root is considered for adjustment every generation. Adjustment occurs with small probability. When a root is adjusted, it is moved a random distance, e.g., less than some variable length, in the direction of a random angle.

The fitness measurement depends on how many values in the generated file match the corresponding value in the target file. The maximum fitness is n . The fittest file, e.g., file C in Fig. 2, to emerge from the genetic algorithm, referred to as the generated file, is most likely not equivalent to the target file. A greedy algorithm is applied to improve the solution and record the error entries in an error file, e.g., file E in Fig. 2.

For data file improvement, once the genetic algorithm converges, the generated file is improved using a greedy algorithm, that systematically adjusts each active root in the following way. An imaginary circle is placed around the root with a random radius. Fitnesses are sampled around the circle to determine the angle we should move the root to maximize fitness. A line is then drawn at this angle, and fitnesses sampled in order to determine the best distance to

-24-

move the root in this direction. The process is typically repeated until further attempts result in little or no improvement in fitness.

Although particular embodiments of the present invention have been described and illustrated, such is not intended to limit the invention. Modifications and changes will no doubt become apparent to those skilled in the art, and it is intended that the invention only be limited by the scope of the appended claims.

THE INVENTION CLAIMED IS

1. A method for compressing and uncompressing data for storage or transmission, wherein a data file is stored as a file of size N , and letting T be a function that maps integers to points in the complex plane P , which is an m degree polynomial, and letting A be a function of the first derivative of P , and B be a function of the second derivative of P , and further letting $C(i)$ be a map to a unique value for each root of P , where $1 \leq i \leq m$, then A and B are then iteratively solved for each $z = T(i)$, $1 \leq i \leq N$, and a solution ultimately converges within some epsilon of one of the roots of P , for when z converges to root j , $C(j)$ is assigned to z , and P , A and B can be defined for any m numbers in the complex plane and color function C to generate a data file of pixel values encoded by m complex numbers.

2. The method of claim 1, wherein given a data file of size N , the m complex numbers and value function C are found that encode said data file using an optimization method including conventional genetic algorithms, wherein for a given target data file to compress, a main process is repeated until a solution sufficiently close to the target is found or some arbitrary maximum number of generations is exceeded, wherein said main process comprises producing a data file for each member of the generation, then evaluating each member's fitness against the target, then scaling the fitness values, then creating $N/2$ couples of polynomials, where each couple is comprised of two polynomials randomly selected from the current generation, and where the probability of a member being assigned to a couple is in

-26-

15 direct proportion to its scaled fitness value, and then, mating each couple to generate two children, allowing for characteristics of each parent to contribute to each child or crossover and allowing for mutation.

5 3. A method for compressing data for storage or transmission, wherein given a complex polynomial and a value assigned to each root, a root generated data file (RGDF) is created, one entry at a time, and each entry is mapped to a point in a complex plane, then an iterative root finding technique is used to map the coordinates of the point to the coordinates of one of the roots of the polynomial, then the value associated with that root is assigned to the entry, whereafter an equational data compression (EDC) method is used to reverse such steps, wherein given a target data file, the EDC method uses a search
10 algorithm to calculate a set of m complex numbers and a value map that will generate the target data file, wherein data files are transmitted or stored by transmitting the m complex numbers, their associated values, and an error file.



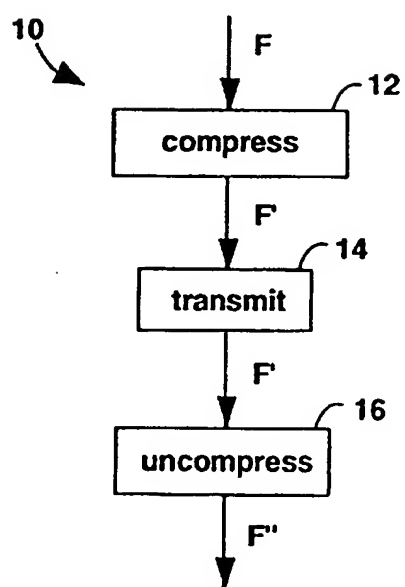
Fig. 1

Fig. 2


3/4

Fig. 3

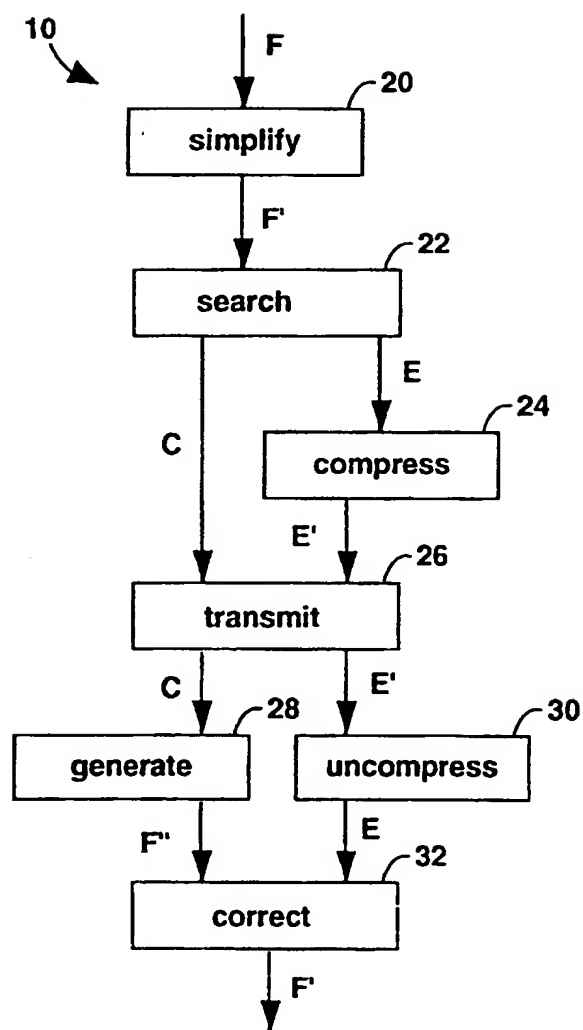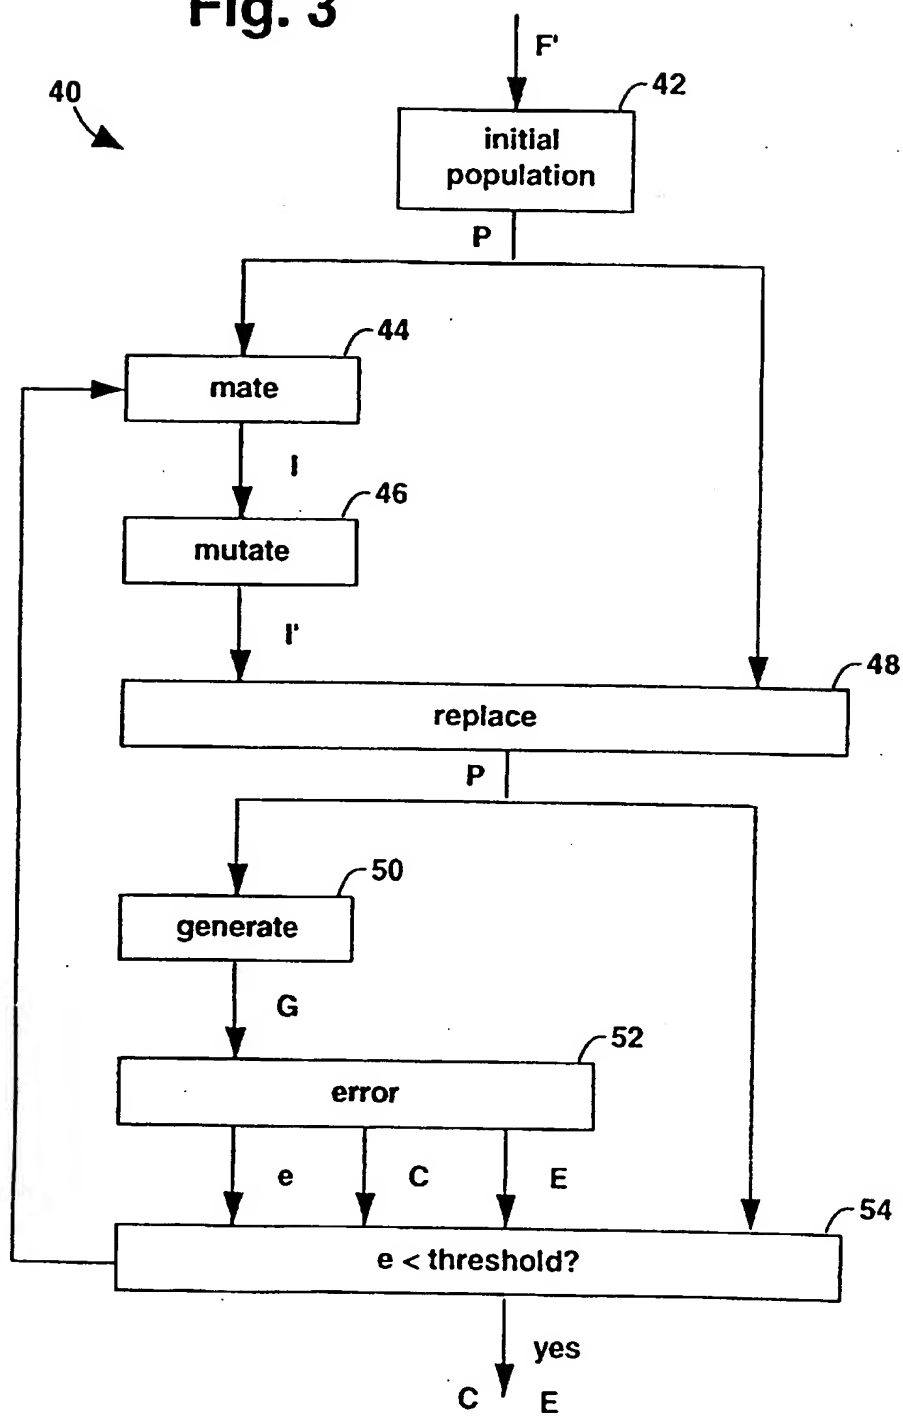

4/4

Fig. 4

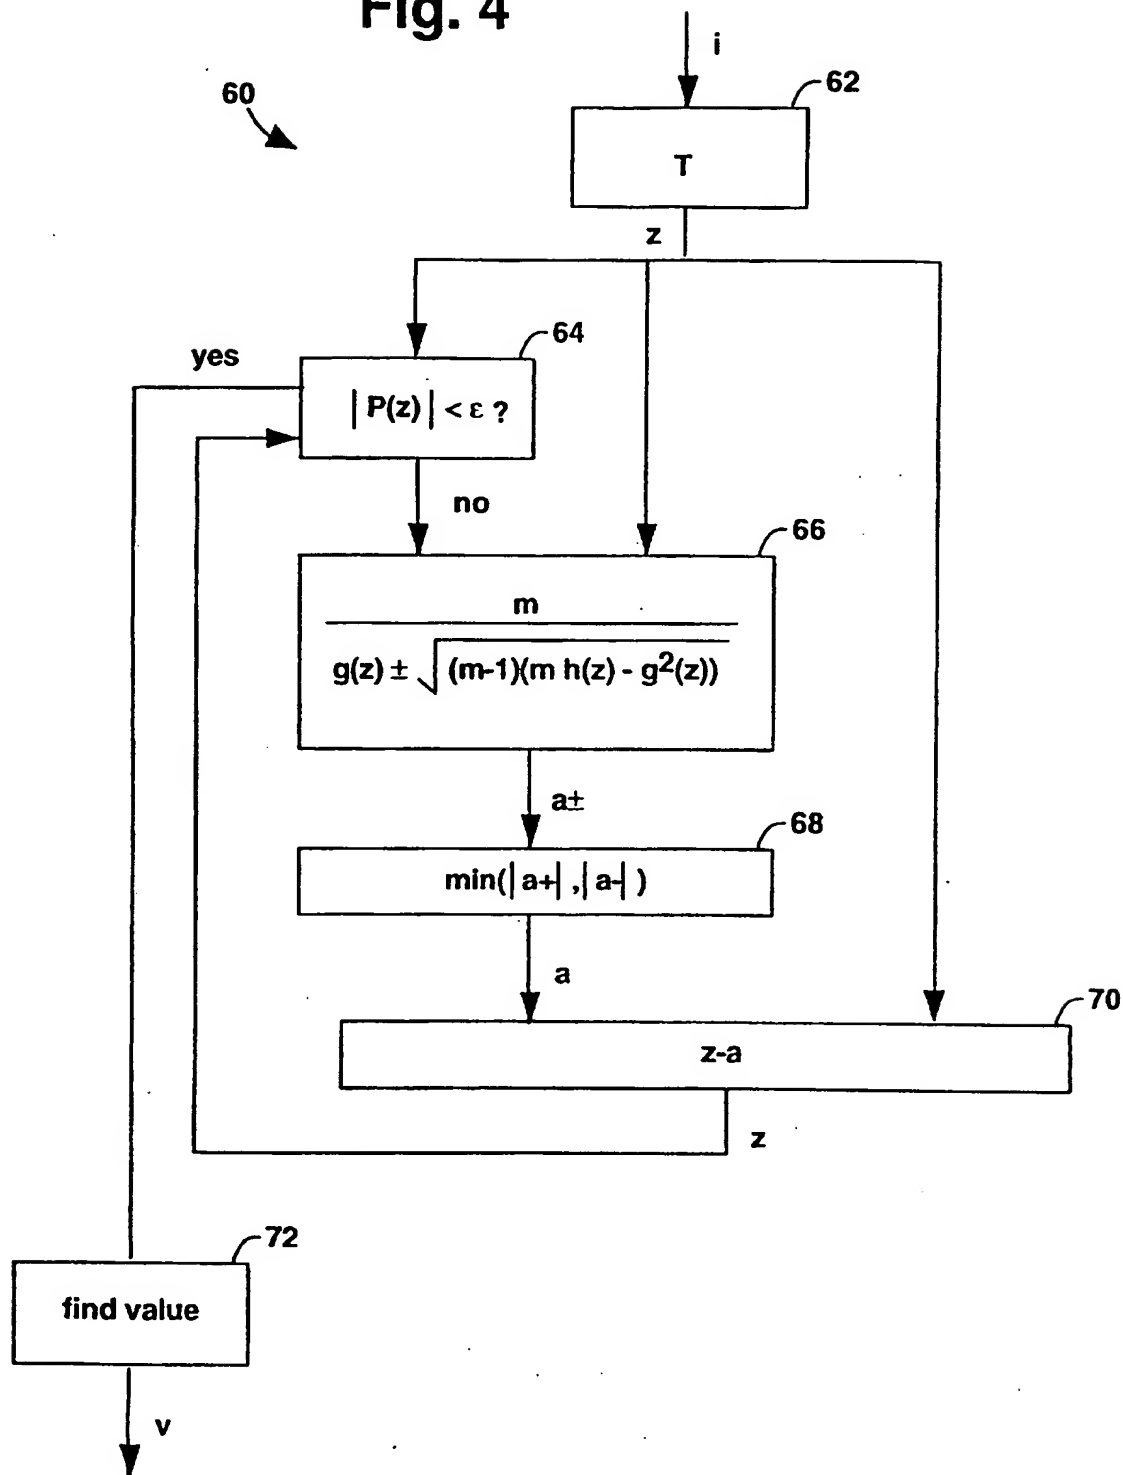

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/05847

A. CLASSIFICATION OF SUBJECT MATTER

IPC(6) :G06K 9/36, 9/46

US CL :382/232, 249; 395/13

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 382/232, 249, 233, 241, 243, 247, 248, 253; 395/13, 612; 364/715.02

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

APS, IEEE/IEEE Publications Ondisc Jan 1990 - Nov 1996

Search terms: complex, polynomial, root, compression, coding, genetic

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US, A 5,343,554 (KOZA et al) 30 August 1994, col. 78, line 60 - col. 79, line 34.	1-3

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be part of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Z" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 10 JULY 1997	Date of mailing of the international search report 20 AUG 1997
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer PHUOC TRAN Telephone No. (703) 305-4861